


HTK(Honda Connectors): LVX series connectors for multi micro-coaxial cable, 0.4 mm pitch, 1.2 mm mated height



Example of application: Mobile phone, Lap-top PC, Network camera etc.

Plug for micro-coaxial cable



R/A plug for micro-coaxial Cable

Wire termination method: Pulse heat solder

P/N: LVX-A30LMSG+ (30 pos.)

P/N: LVX-A40LMSG+ (40 pos.)


Applicable cable: 42 AWG (7/0.025 mm) micro-coaxial cable

Insulation jacket O.D: 0.3 mm dia.



Pulse heat equipment

Receptacle for board

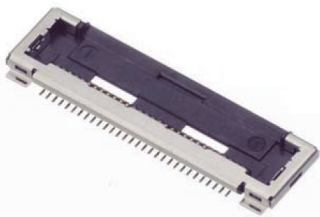


Vertical receptacle for board

SMT solder type

P/N: LVX-A30SFYG+ (30 pos.)

P/N: LVX-A40SFYG+ (40 pos.)

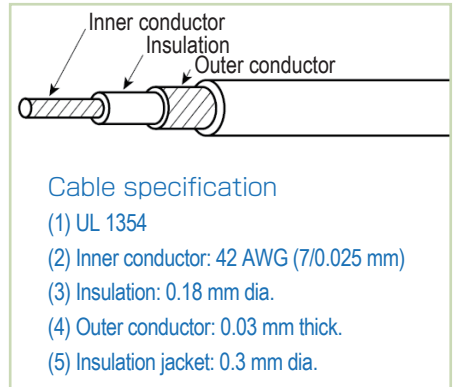

Specifications

Rated voltage	100 VAC (r.m.s)
Rated current	0.2 A / contact
Insulation resistance	100 MΩ minimum at 250 V DC
Dielectric withstanding voltage	250 VAC (r.m.s) / one minute
Operating temperature range	- 20 to + 70°C.

Material and Finish

Parts name	Material and Finish
Insulator	LCP resin (GF), UL 94V-0 (Color: Black)
Contact	Copper alloy, Gold over nickel plated
Plug shielded shell	Stainless steel, selective tin plated
Receptacle shielded shell	Stainless steel, tin plated

Rev.1.3

Distributor

TOKOH DENKI CO., LTD.

Home Page: <http://www.tokoh.biz/>

E-Mail: office@tokoh.biz

