



HTK(Honda Connectors): RJ-45 shielded type, modular connectors with screw lock


Cable side plug with jack screw

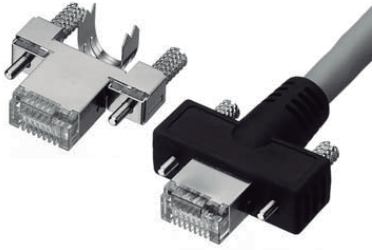

P/N: MOD-YSP88P03+

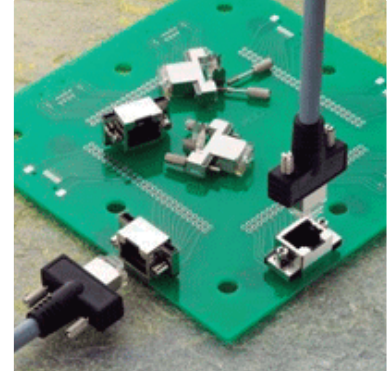


R/A board side jack with screw lock device, SMT solder type

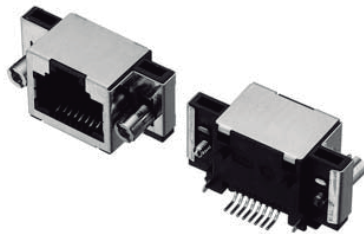

P/N: MOD-YSJ88YA03C+

Vertical board side jack with screw lock device, DIP solder type

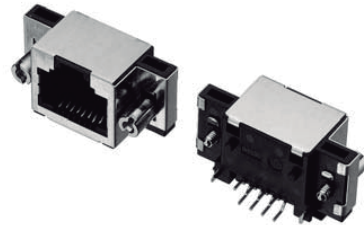

P/N: MOD-YSJ88D03C+

Specifications

Rated voltage	125 V AC (r.m.s)
Rated current	0.5 to 1.0 A (Jack)
Insulation resistance	1,000 MΩ at 100 V DC
Dielectric withstanding voltage	500 V AC (r.m.s) /one minute
Operating temperature	- 40 to + 85 °C

Material and Finish

Parts name	Material and Finish
Plug insulator	PC resin UL 94V-2, (Color: Transparent)
Jack insulator	PA9T (GF) resin, UL94 V-0 (Color, Black)
Plug shielded shell	Stainless steel
Jack shielded shell	Brass, Tin plated
Plug over molding	Elastomer (Color: Black)
Plug contact, Jack contact	Phosphor bronze, Gold over nickel plated
Jack screw, Female screw lock	Steel, Nickel plated
Jack hex nut	Steel, Nickel plated

Rev.1.3

Distributor

TOKOH DENKI CO., LTD.

Home Page: <http://www.tokoh.biz/>

E-Mail: office@tokoh.biz

